



Novo Agua SA de CV

27 de enero 6212 Col. 16 de septiembre. Monterrey N.L.. C.P. 64160 Tel.: 8129-5307; Tel. y fax: 8311-8352

5810

AQUATECH
USA
LAS VEGAS (NV) - USA
21-24 APRIL
2015

FLOW RATES (50 PSI INLET) - VALVE ALONE

Piston	Downflow	Uplow	Filter
Continuous	36 GPM	39 GPM	31 GPM
(15 psi drop)	8.2 m ³ /hr	7.9 m ³ /hr	7.0 m ³ /hr
Peak	47 GPM	45 GPM	40 GPM
(25 psi drop)	10.6 m ³ /hr	10.1 m ³ /hr	9.0 m ³ /hr
Cv (flow at 1 psi drop)	9.4	8.9	9.0
Max. Backwash (25 psi drop)	28 GPM 6.3 m ³ /hr	30 GPM 6.9 m ³ /hr	33 GPM 7.5 m ³ /hr


REGENERATION

Downflow/Uplow	Both
Adjustable Cycles	Yes
Time Available	
SXT:	0 - 199 min/cycle
XTR2:	0 - 240 min/cycle

DIMENSIONS

Distributor Pilot	1.05" O.D. (26.7 mm) 32 mm I.D. 1" I.D. (25.4 mm)
Drain Line	3/4" or 1" NPTM
Brine Valve 1600:	3/8" or 1/2"
Injector System	1610
Mounting Base	2.5" - 8 NPSM
Height from Top of Tank	11.3" (287 mm)
Riser Height	1/4" Below top of tank







Novo Agua SA de CV

27 de enero 6212 Col. 16 de septiembre. Monterrey N.L.. C.P. 64160 Tel.: 8129-5307; Tel. y fax: 8311-8352

5810 SERVICIO

WQA
AQUATECH
USA
LAS VEGAS (NV) • USA
21-24 APRIL
2015

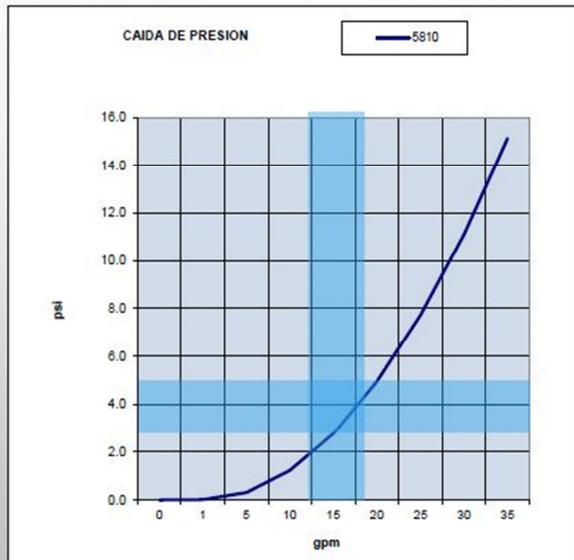



Novo Agua SA de CV

27 de enero 6212 Col. 16 de septiembre. Monterrey N.L.. C.P. 64160 Tel.: 8129-5307; Tel. y fax: 8311-8352

5810 RETRO-LAVADO

WQA
AQUATECH
USA
LAS VEGAS (NV) - USA
21-24 APRIL
2015

- 28 GPM SUAVIZADOR
- 33 GPM FILTRO

Ø	Resin	Carbon	MM	
	6 gpm	12 gpm	16 gpm	20 gpm
9"	2.6	5.3	7	9
10"	3.3	7	9	11
12"	4.7	9	13	16
13"	5	11	14	18
14"	7	13	18	22
16"	8	17	22	28
18"	11	21	29	36
21"	14	29	38	48
24"	18	36	48	60





Novo Agua SA de CV

27 de enero 6212 Col. 16 de septiembre. Monterrey N.L.. C.P. 64160 Tel.: 8129-5307; Tel. y fax: 8311-8352

5812

AQUATECH
USA
LAS VEGAS (NV) - USA
21-24 APRIL
2015

FLOW RATES (50 PSI INLET) - VALVE ALONE - 2.5" BASE

Piston	Downflow	Upflow	Filter
Continuous (15 psi drop)	43 GPM 9.9 m ³ /hr	39 GPM 8.9 m ³ /hr	37 GPM 8.4 m ³ /hr
Peak (25 psi drop)	56 GPM 12.7 m ³ /hr	51 GPM 11.9 m ³ /hr	47 GPM 10.7 m ³ /hr
Cv (flow at 1 psi drop)	11.2	10.1	9.4
Max. Backwash (25 psi drop)	33 GPM 7.5 m ³ /hr	36 GPM 8.1 m ³ /hr	45 GPM 9.9 m ³ /hr

FLOW RATES (50 PSI INLET) - VALVE ALONE - 4" BASE

Piston	Downflow	Upflow	Filter
Continuous (15 psi drop)	45 GPM 10.3 m ³ /hr	40 GPM 9.1 m ³ /hr	38 GPM 8.7 m ³ /hr
Peak (25 psi drop)	59 GPM 13.3 m ³ /hr	52 GPM 11.7 m ³ /hr	50 GPM 11.3 m ³ /hr
Cv (flow at 1 psi drop)	11.7	10.3	9.9
Max. Backwash (25 psi drop)	34 GPM 7.8 m ³ /hr	36 GPM 8.2 m ³ /hr	45 GPM 10.2 m ³ /hr





Novo Agua SA de CV

27 de enero 6212 Col. 16 de septiembre. Monterrey N.L.. C.P. 64160 Tel.: 8129-5307; Tel. y fax: 8311-8352

5812

AQUATECH
USA
LAS VEGAS (NV) - USA
21-24 APRIL
2015

REGENERATION

Downflow/Upflow	Both
Adjustable Cycles	Yes
Time Available	
SXT:	0 - 199 min/cycle
XTR2:	0 - 240 min/cycle

DIMENSIONS

Distributor Pilot	1.05" O.D. (26.7 mm) 32 mm I.D. 1" I.D. (25.4 mm)
Drain Line	1.5" NPTF Quick-Connect
Brine Valve 1600:	3/8"
Injector System	1610
Mounting Base	2.5" - 8 NPSM 4" - NPSM
Height from Top of Tank	12" (305 mm)
Riser Height	1/4" Below top of tank






Novo Agua SA de CV

27 de enero 6212 Col. 16 de septiembre. Monterrey N.L.. C.P. 64160 Tel.: 8129-5307; Tel. y fax: 8311-8352

5812 SERVICIO

WQA
AQUATECH
USA
LAS VEGAS (NV) - USA
21-24 APRIL
2015

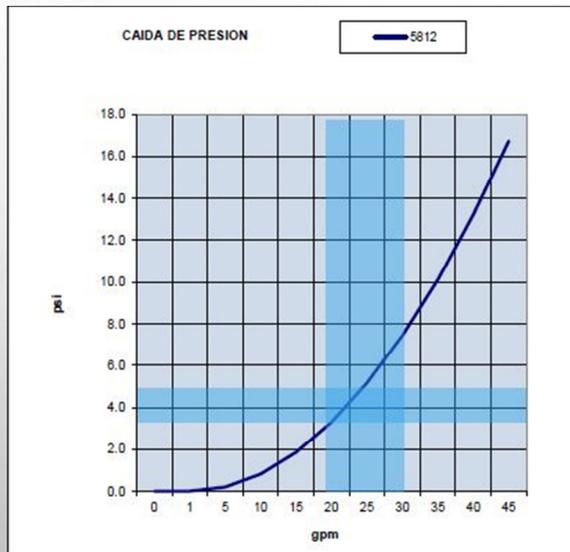

WQA
Modular
Education Program





Novo Agua SA de CV

27 de enero 6212 Col. 16 de septiembre. Monterrey N.L.. C.P. 64160 Tel.: 8129-5307; Tel. y fax: 8311-8352

5812 RETRO-LAVADO

WQA
AQUATECH
USA
LAS VEGAS (NV) - USA
21-24 APRIL
2015

- 33 GPM SUAVIZADOR
- 45 GPM FILTRO

Ø	Resin	Carbon	MM	
	6 gpm	12 gpm	16 gpm	20 gpm
9"	2.6	5.3	7	9
10"	3.3	7	9	11
12"	4.7	9	13	16
13"	5	11	14	18
14"	7	13	18	22
16"	8	17	22	28
18"	11	21	29	36
21"	14	29	38	48
24"	18	36	48	60



\\DROBO-FS\QuickDrops\JB\PPTX
NG\Droplets\LightingOverlay.png

