



# Water Coolers

## WATER-COOLED

## PLF16FAW, PLF16FAWCP

### Suggested Specification

These special purpose coolers feature water-cooled condenser, not air-cooled and are designed for installations where high room temperatures and/or dust conditions are present. Maintenance is reduced in dusty atmospheres since condenser coil can not clog. Cabinet finish shall be Sandstone powder coated paint on galvanized steel or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall be listed by Underwriter's Laboratories to U.S. and Canadian standards and conform to European Union Directives.

### Models

**PLF16FAW** delivers 15.7 gph of chilled drinking water. **PLF16FAWCP** is corrosion resistant and has a stainless steel cabinet, frame, base parts and fasteners. Special protective coating is applied to compressor, condensor, cooling tank, pre-cooler, water drain and interconnecting water and refrigeration lines.

### Standard Features

- > Waterways Are Lead-Free In Materials & Construction
- > Dial-A-Drink® Bubbler
- > Stainless Steel Top
- > Heavy-Gauge Galvanized Structural Steel Frame
- > High-Efficiency Cooling Tank and Coil
- > Internal Air-Gap Provided on Water-Cooled Condenser Water Outlet
- > Refrigerant R-134a
- > Limited 5-year Warranty

### Finishes

- > Standard Cabinet Finish: Sandstone powder coat paint on galvanized steel.
- > Optional finishes at extra cost: Stainless Steel
- > Standard cabinet finish Model PLF16FAWCP: Stainless Steel

### Accessories

- > Glass Filler - Push Handle (029603-004)
- > Glass Filler - Push Back (029603-005)
- > Glass Filler - Push Down (029603-005)
- > Kit 029440-001 is required for Field Installation for the above glass fillers
- > Foot pedal operated



Components in these water coolers are lead free as defined by the Safe Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

### Installation

- > Prior to roughing-in consult with local, state, and federal codes
- > Shipped with complete instructions

**Limited 5-Year Warranty** (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

**Export Warranty:** One year on sealed refrigeration system and most components parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.


Models covered by this specification complies with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards and conform to European Union Directives.




Model	50° F Drinking Water 90° F Ambient Air Temp*			Ho'tN Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF16FAW	15.7	8.4	Yes	No	1/5	3.6	280	Yes	Yes	105 Lbs.
PLF16FAWCP	15.7	8.4	Yes	No	1/5	3.6	280	Yes	No	105 Lbs.

\*Industry Standard Rating Condition 80° F inlet water temperature. Specifications subject to change without notice


# OASIS® WATER-COOLED CONDENSER WATER COOLER MODELS PLF16FAW, PLF16FAWCP

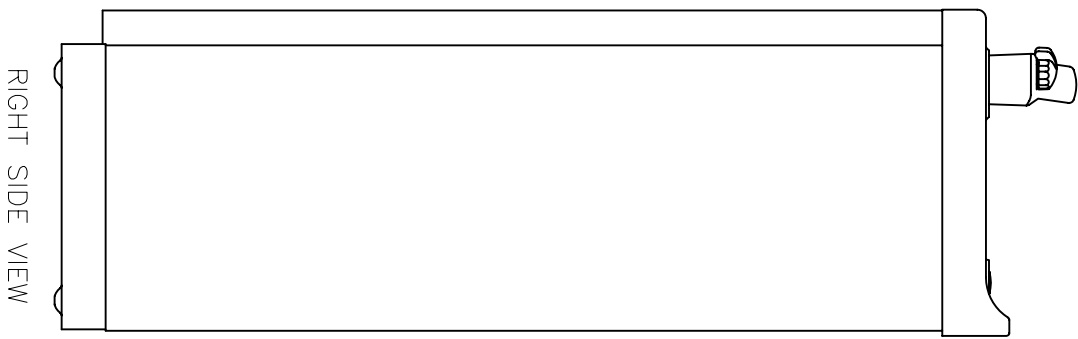

RIGHT SIDE VIEW

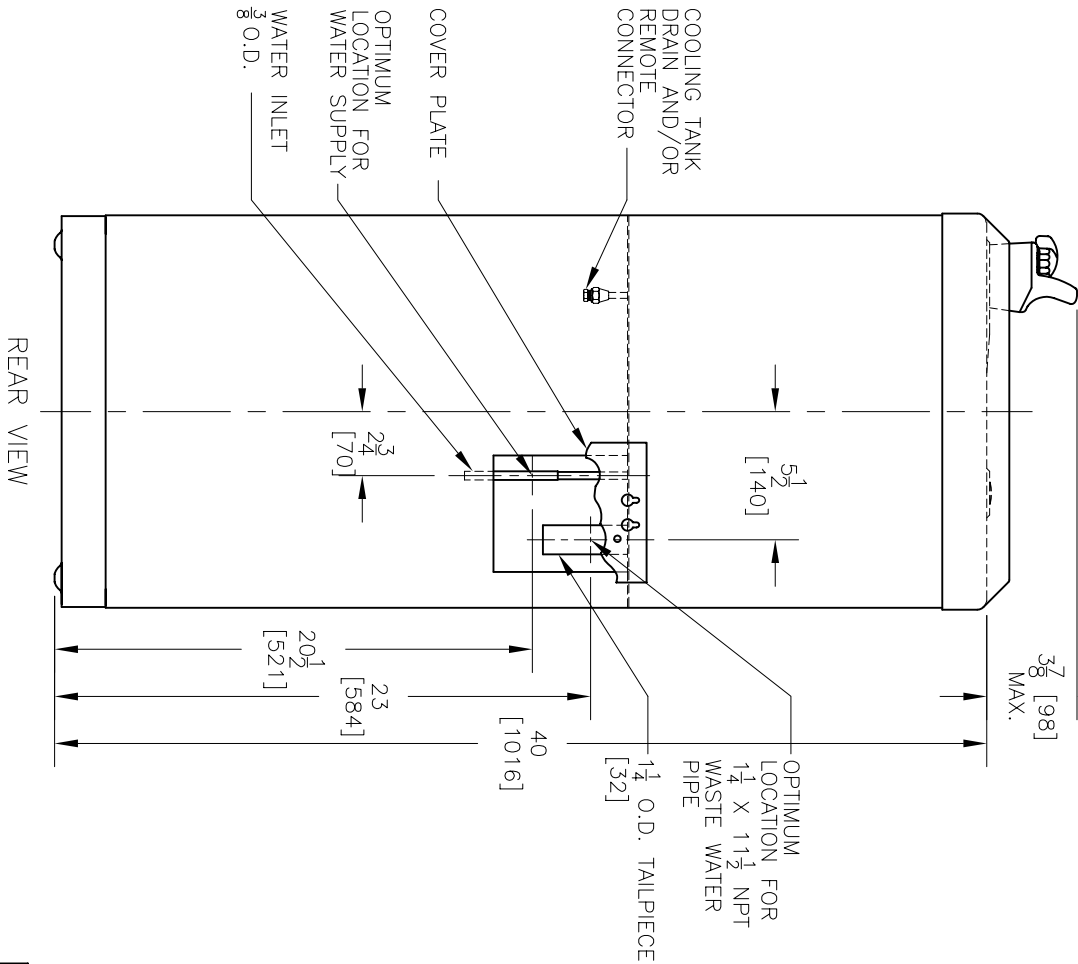

REAR VIEW

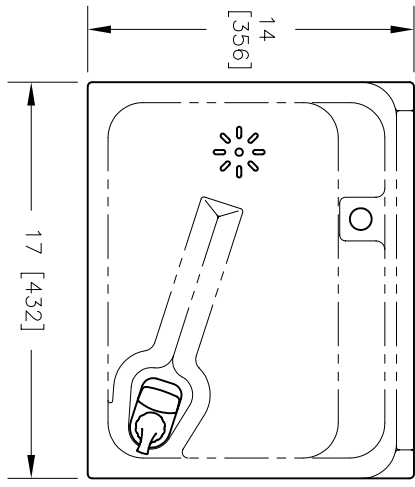

TOP VIEW

ALL DIMENSIONS ARE IN INCHES.  
 DIMENSIONS IN BRACKETS [ ]  
 ARE IN MILLIMETERS.  
 ALLOW 4" [102] FOR VENTILATION  
 IF WATER COOLER IS SET IN AN  
 ALCOVE OR NEAR A CORNER.

<p>THIRD ANGLE PROJECTION</p>	<p>ROUGHING-IN                  AND                  DIMENSIONAL                  DRAWING</p>
-------------------------------	---