

# WATER COOLER PRODUCT CATALOG



*True refreshment has  
a taste all its own.*

# THE PERFECT COMBINATION OF QUALITY, EFFICIENCY & INNOVATION

## OASIS offers *COOLER* solutions

Whether it is reducing waste, improving energy efficiency, reducing environmental impact or offering a safer product, you can be assured Oasis is committed to making quality products to satisfy the markets needs.

### HeliCool™

- The HeliCool system was developed to improve cooling efficiency and simplify service.
- This proprietary system is being rolled through out the Oasis water cooler line over the near term.
- Improved efficiency is a direct result of the evaporator being completely surrounded by water which flows along the helical pathway.
- The helical pathway forces water along the copper cooling coil much longer than traditional designs.
- As a result, Oasis coolers equipped with the HeliCool system are 10% more efficient than previous models




### Antimicrobial Copper: MD-Cu<sub>29</sub>

- MD-CU<sub>29</sub> is an EPA registered antimicrobial copper that fights off microorganisms which include MRSA and e-coli. Oasis uses MD-CU<sub>29</sub> on key cooler touch points to help prevent the spread of disease and continuously works to control the growth of bacterial on the water coolers
- Along with antimicrobial copper, Oasis offers hands free operated bottle fillers which helps to dramatically reduce the spread of germs in hospitals, schools, airports and other busy public buildings.
- MD-CU<sub>29</sub> components are utilized on the Oasis wheelchair accessible line of Versacooler II water coolers and our Versafiller bottle filler products.



### Hydrocarbons

- Oasis now uses hydrocarbon refrigerant R600 that replaced R134a in a number of our most popular products.
- R600 helps reduce green-house gases which in turn helps in with global warming and climate change battle.
- In addition independent testing indicated 25% less electrical power is consumed with the use of R600 refrigerant vs. R134a.





# Bottle Fillers



There is a growing demand for clean and green products in today's market. Oasis continues to be on the forefront of innovation and development of "environmentally friendly solutions" for dispensing, filtering and cooling our most important resource.

## OASIS - COOLER INNOVATION and WATER FRIENDLY SOLUTIONS



Key Aqua Pointe bottle filler molded components contain Freshield®, which utilizes a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discoloration, odors and degradation.



### MAKE YOUR FACILITY GREEN

by reducing the cost and waste associated with disposable plastic water bottles and provide great-tasting filtered water on-demand.





# ELECTRONIC BOTTLE FILLERS

## Versacooler® II with VersaFiller®



Versacooler II with Electronic Bottle Filler

Bi-level Versacooler II with Electronic Bottle Filler

Electronic Bottle Filler Retro Fit Kit



**PG8EBF  
PGEBF**



**PG8EBFSL  
PGEBFSL**

Universal bi-level: can be installed left high and right low or right high and left low.



PWEBF is designed to fit existing OASIS PG8AC and select competitors' units

**PWEBF**

### Standard Features

#### PG8EBF/PGEBF and PG8EBFSL/PGEBFSL

- Four antimicrobial copper push pads
- Antimicrobial flex bubbler
- Hands free bottle filler with programmable shut off timer
- Integrated bottle counter and filter monitor
- Stainless steel top
- Heavy duty galvanized steel frame
- Lead-free waterways
- Built-in 100 micron strainer stops particles before they enter the waterway
- External stream height adjustment



### Options

- Antimicrobial chrome plated brass bubbler (036700-001)
- Stainless steel finish
- Oasis VersaFilter system
- Apron for bi-level units

### Standard Features

- Hands free bottle filler with programmable shut off timer
- Integrated bottle counter and filter monitor
- Stainless steel finish
- Heavy duty steel frame
- Lead-free waterways
- Surface mount frame assembly
- Optional gaskets available to retrofit: many Elkay EZ & LZ, Sunroc ADAD and Haws coolers

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Auto-Off Water Flow	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PG8EBF	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	60 lbs.
PGEBF	Non-Refrigerated							Yes	Yes	26 lbs.
PG8EBFSL	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	100 lbs.
PGEBFSL	Non-Refrigerated							Yes	Yes	66 lbs.
PWEBF	N/A	N/A	No	No	N/A	.20	.1	Yes	No	10 lbs.

# MECHANICAL BOTTLE FILLERS

## Versacooler® II with VersaFiller®



Versacooler II with  
Mechanical Bottle Filler

Bi-level Versacooler II with  
Mechanical Bottle Filler

Mechanical Bottle Filler  
Retro Fit Kit



Universal split-level: can be  
installed left high and right low  
or right high and left low.



PWSBF is designed to fit  
existing OASIS PG8AC and  
select competitors' units

**PG8SBF  
PG8SBF**

**PG8SBFSL  
PG8SBFSL**

**PWSBF**

### Standard Features

**PG8SBF/PG8SBF and PG8SBFSL/PG8SBFSL**

- Four antimicrobial copper push pads
- Antimicrobial flex bubbler
- Mechanical bottle filler
- Stainless steel top
- Heavy duty galvanized steel frame
- Lead-free waterways
- Built-in 100 micron strainer stops particles before they enter the waterway
- External stream height adjustment



**Freshield**

### Options

- Antimicrobial chrome plated brass bubbler (036700-001)
- Stainless steel finish
- Oasis VersaFilter system
- Apron for bi-level units

### Standard Features

- Mechanical bottle filler
- Stainless steel finish
- Heavy duty steel frame
- Lead-free waterways
- Surface mount frame assembly
- Optional gaskets available to retrofit: many Elkay EZ & LZ, Sunroc ADAD and Haws coolers

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Auto-Off Water Flow	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PG8SBF	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	74 lbs.
PG8SBF	Non-Refrigerated							Yes	Yes	44 lbs.
PG8SBFSL	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	104 lbs.
PG8SBFSL	Non-Refrigerated							Yes	Yes	74 lbs.
PWSBF	N/A	N/A	No	No	N/A	.20	.1	Yes	No	10 lbs.

\*All performance data measured with 80° F inlet water temperature. Specifications subject to change without notice.

# BOTTLE FILLERS

## Vandal Resistant Versacooler® II with VersaFiller®



Vandal Resistant Versacooler II  
With Electronic Bottle Filler



PGV8EBF  
PGVEBF

PGV8EBFSL  
PGVEBFSL

Vandal Resistant Versacooler II  
With Mechanical Bottle Filler



PGV8SBF  
PGVSBF

PGV8SBFSL  
PGVSBFSL

### Standard Features

- Antimicrobial vandal resistant bubbler keyed into position
- Vandal resistant front push button
- Vandal resistant panel fasteners
- Heavy duty galvanized steel louver and bottom screens
- Stainless steel finish

### PLUS

- Hands free bottle filler with programmable shut off timer
- Integrated bottle counter and filter monitor

### Standard Features

- Antimicrobial vandal resistant bubbler keyed into position
- Vandal resistant front push button
- Vandal resistant panel fasteners
- Heavy duty galvanized steel louver and bottom screens
- Stainless steel finish

### PLUS

- Mechanical bottle filler

### Options

- Antimicrobial chrome plated brass bubbler (036700-001)
- Oasis VersaFilter system
- Apron for bi-level units



Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Auto-Off Water Flow	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PGV8EBF	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	80 lbs.
PGVEBF	Non-Refrigerated							Yes	Yes	50 lbs.
PGV8EBFSL	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	110 lbs.
PGVEBFSL	Non-Refrigerated							Yes	Yes	80 lbs.
PGV8SBF	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	75lbs.
PGVSBF	Non-Refrigerated							Yes	Yes	45 lbs.
PGV8SBFSL	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	105 lbs.
PGVSBFSL	Non-Refrigerated							Yes	Yes	75 lbs.



# MODULAR BOTTLE FILLERS

## Radii™ Fountain With Bottle Filler



Radii Fountain With  
Electronic Bottle Filler



**M8EBF**  
**M12EBF**

Bi-level Radii Fountain With  
Integrated Electronic Bottle Filler



**M8CREBF**

### Options

- Antimicrobial chrome plated brass bubbler (036700-001)
- Oasis green filter replacement cartridge (034763-216)



**Freshield**

### Standard Features

- Antimicrobial flex bubbler
- Hands free bottle filler with programmable shut off timer
- Integrated bottle counter and filter monitor
- High efficiency cooling tank and coil
- Built-in 100 micron strainer stops particles before they enter the waterway
- Lead-free waterways
- Heavy duty steel frame
- High efficiency cooling tank and coil
- Built in panel locks for easy access to chiller and filtration

### Also available with Mechanical Bottle Fillers



**MG8SBF**  
**MG12SBF**



**M8CRSBF**

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Auto-Off Water Flow	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
M8EBF	8.0	8.0	No	No	1/4	4.9	500	Yes	No	150 lbs.
M12EBF	12.0	12.0	No	No	1/3	5.5	550	Yes	No	152 lbs.
M8CREBF	8.0	8.0	No	No	1/4	4.9	500	Yes	No	166 lbs.
MG8SBF	8.0	8.0	No	No	1/4	4.8	540	Yes	No	145 lbs.
MG12SBF	12.0	12.0	No	No	1/3	5.4	540	Yes	No	147 lbs.
M8CRSBF	0.0	0.0	No	No	1/4	4.8	540	Yes	No	161 lbs.

\*All performance data measured with 80° F inlet water temperature. Specifications subject to change without notice.

# MODULAR BOTTLE FILLERS

## Radii™ Fountain With Bottle Filler



Radii Fountain with Electronic Bottle Filler



**M8WREBF**  
**M12WREBF**

Non Refrigerated, Bi-level Radii Fountain with Electronic Bottle Filler



**MMRSLEBF**

Non Refrigerated, Radii Fountain with Electronic Bottle Filler



**M140REBF**



### Standard Features

- Antimicrobial flex bubbler
- Hands free bottle filler with programmable shut off timer
- Integrated bottle counter and filter monitor
- Built-in 100 micron strainer stops particles before they enter the waterway
- Lead-free waterways
- Heavy duty steel frame
- Built in panel locks for easy access to chiller and filtration
- Can be installed high low or low high for MMRSLEBF

### Standard Features

- Antimicrobial flex bubbler
- Hands free bottle filler with programmable shut off timer
- Integrated bottle counter and filter monitor
- High efficiency cooling tank and coil
- Built-in 100 micron strainer stops particles before they enter the waterway
- Lead-free waterways
- Heavy duty steel frame
- High efficiency cooling tank and coil
- Built in panel locks for easy access to chiller and filtration

### Options

- Antimicrobial chrome plated brass bubbler (036700-001)
- Oasis green filter replacement cartridge (034763-216)

### Also available with Mechanical Bottle Fillers



**MMRSLSBF**

**M140RSBF**

**M8WRSBF**  
**M12WRSBF**

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Auto-Off Water Flow	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
M8WREBF	8.0	8.0	No	No	1/4	4.9	500	Yes	No	171 lbs.
M12WREBF	12.0	12.0	No	No	1/3	5.5	550	Yes	No	173 lbs.
MMRSLEBF	0.0	0.0	No	No	N/A	.20	7	Yes	No	85 lbs.
M140REBF	8.0	8.0	No	No	N/A	.20	7	Yes	No	41 lbs.



# MODULAR BOTTLE FILLERS

## Recessed and Surface Mount Filler



Recessed Electronic  
Bottle Filler



**MWEBF  
MW8EBF  
MW12EBF**

Recessed Mechanical  
Bottle Filler



**MWGSBF  
MWG8SBF  
MWG12SBF**

Surface Mount  
Electronic Bottle Filler



**PWSMEBF**

Surface Mount  
Mechanical Bottle Filler



**PWSMSBF**

**SPACE SAVER!**

### Standard Features

- Slim and space saving design
- Heavy duty steel frame
- Available with optional R8 chiller
- Built-in 100 micron strainer stops particles before they enter the waterway
- Lead-free waterways

### Standard Features

- Integrated bottle counter and filter monitor (electronic only)
- Built in panel locks for easy access to chiller and filtration
- Built-in 100 micron strainer stops particles before they enter the waterway
- Lead-free waterways
- Heavy duty steel frame

*Note: Chillers sold with Surface Mount models must be remotely installed.*



### Also available in Surface Mount Bottle Fillers



**MWSM8EBF  
MWSM12EBF  
MWSMEBF**



**MWSMG8SBF  
MWSMG12SBF  
MWSMGSBF**

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Auto-Off Water Flow	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
MWG8SBF	8.0	8.0	No	No	1/4	4.8	490	Yes	No	103 lbs.
MWG12SBF	12.0	12.0	No	No	1/3	5.4	540	Yes	No	105 lbs.
MWGSBF	Non-Refrigerated							Yes	No	45 lbs.
MW8EBF	8.0	8.0	No	No	1/4	4.9	500	Yes	No	102 lbs.
MW12EBF	12.0	12.0	No	No	1/3	5.5	550	Yes	No	106 lbs.
MWEBF	Non-Refrigerated							Yes	No	44 lbs.
PWSMSBF	0.0	0.0	N/A					Yes	No	10 lbs.
PWSMEBF	0.0	0.0	N/A			.10	.1	Yes	No	15 lbs.

\*All performance data measured with 80° F inlet water temperature. Specifications subject to change without notice.

# COPPER COOLERS & FOUNTAINS



Touch Free,  
Copper Versacooler II



**PG8ACT-CSTN**  
**PGACT-CSTN**

Copper Versacooler II



**PG8AC-CSTN**  
**PGAC-CSTN**

Copper, Bi-Level Versacooler II



**PG8ACSL-CSTN**  
**PGACSL-CSTN**

Copper, Bi-Level Versacooler II  
With Electronic Bottle Filler



**PG8EBFSL-CSTN**  
**PGEBFSL-CSTN**

Copper Versacooler II With  
Mechanical Bottle Filler



**PG8SBF-CSTN**  
**PGSBF-CSTN**

## Standard features

- MD-Cu<sub>29</sub> antimicrobial copper top, front nose, and push pads (if mechanical activation)
- Optional touch free activation with hands down technology under the front nose
- Lead-free waterways
- NSF/ANSI 372
- Built-in 100 micron strainer stops particles before they enter the waterway
- Available with or without refrigeration system

## Options

- Antimicrobial chrome plated brass bubbler (036700-001)
- Oasis VersaFilter system
- Apron for bi-level units

Available in multiple configurations:

Wall Mounted Water Coolers	With Electronic Bottle Fillers	With Mechanical Bottle Fillers
PG8AC-CSTN, PGAC-CSTN	PG8EBF-CSTN, PGEBF-CSTN	PG8SBF-CSTN, PGSBF-CSTN
PG8ACT-CSTN, PGACT-CSTN	PG8EBFT-CSTN, PGEBFT-CSTN	PG8SBFT-CSTN, PGSBFT-CSTN
PG8ACSL-CSTN, PGACSL-CSTN	PG8EBFSL-CSTN, PGEBFSL-CSTN	PG8SBFSL-CSTN, PGSBFSL-CSTN
PG8ACSLTM-CSTN, PGACSLTM-CSTN	PG8EBFSLTM-CSTN, PGEBFSLTM-CSTN	PG8SBFSLTM-CSTN, PGSBFSLTM-CSTN

# BARRIER-FREE VERSACOOLER® II

## ADA Single & Bi-Level Coolers



ADA Versacooler II



PG8AC  
PGAC

Vandal Resistant Versacooler II



PGV8AC  
PGVAC

Touch Free Versacooler II



PG8ACT  
PGACT

### Standard Features

- Four antimicrobial copper push pads
- Antimicrobial flex bubbler
- Built-in 100 micron strainer stops particles before they enter the waterway
- ADA compliant for both adult or child when properly installed
- Lead-free waterways
- Stainless steel top
- Heavy duty galvanized steel frame
- High efficiency cooling tank and coil
- External stream height adjustment

### Options

- Antimicrobial chrome plated brass bubbler (036700-001)
- Push handle glass filler (029603-004)
- Oasis VersaFilter system
- Apron for bi-level units

Standard Features includes all of the PG8AC features PLUS

- Vandal resistant front push button
- Vandal resistant panel fasteners
- Galvanized steel louver and bottom screens

Standard Features includes all of the PG8AC features PLUS

- Sensor equipped for automatic operation
- Water flow stops after 30 seconds if user does not move away

## Universal Bi-Level

One Box, One Cooler, One Install.  
Can be installed left low and right high or left high and right low



PG8ACSL  
PGACSL



PG8ACSLTM  
PGACSLTM



PGV8ACSL  
PGVACSL

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PG8AC	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	64 lbs.
PGAC	Non-Refrigerated							Yes	Yes	34 lbs.
PG8ACSL	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	94 lbs.
PGACSL	Non-Refrigerated							Yes	Yes	64 lbs.
PGV8AC	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	62 lbs.
PGVAC	Non-Refrigerated							Yes	Yes	32 lbs.
PGV8ACSL	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	95 lbs.
PGVACSL	Non-Refrigerated							Yes	Yes	65 lbs.
PG8ACT	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	64 lbs.
PGACT	Non-Refrigerated							Yes	Yes	34 lbs.
PG8ACSLTM	8.0	8.0	No	No	1/4	4.4	460	Yes	Yes	95 lbs.
PGACSLTM	Non-Refrigerated							Yes	Yes	65 lbs.

\*All performance data measured with 80° F inlet water temperature. Specifications subject to change without notice.



# 14 GAUGE VERSACOOLER® II



## Heavy Duty, Vandal Resistant Versacooler II

- 14 gauge stainless steel construction
- Vandal resistant bubbler keyed into position
- Single vandal resistant mechanical activation
- Stream height adjustment
- Heavy duty galvanized steel frame and ventilation screens



PGV8AC-14G



PGV8ACSL-14G

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PGV8AC-14G	8.0	8.0	No	No	1/4	4.4	450	No	No	80 lbs.
PGV8ACSL-14G	8.0	8.0	No	No	1/4	4.4	500	No	No	150 lbs.

\*All performance data measured with 80° F inlet water temperature. Specifications subject to change without notice.

# 14 GAUGE FOUNTAINS



## Heavy Duty, Vandal Resistant Fountain

### Standard Features

- 14 gauge stainless steel construction
- Vandal resistant bubbler keyed into position
- Single vandal resistant mechanical activation
- Stream height adjustment
- Brass P-Trap
- Vandal resistant panel fasteners



F140PM-14G



MSSLPM-14G

Model	Style	Net Wt. Approx.
F140PM-14G	Fountain	23 lbs.
MSSLPM-14G	Fountain	70 lbs.

# STANDARD MODULAR FOUNTAINS



### Standard Features

- Flex bubbler
- Lead-free waterways
- Stainless steel finish with heavy-duty galvanized steel frame
- Modular fountains include back panel(s) and mounting frame(s)
- Frostproof fountains include back panel and control box assembly
- Built in 100 micron strainer stops particles before they enter the waterway

Model	Style	Net Wt. Approx.
M110PM	Modular	32 lbs.
M140PM	Modular	34 lbs.
M110FZ	Modular	45 lbs.
M140FZ	Modular	46 lbs.
MSSLPM	Modular	70 lbs.

M140R



M140PM



MMRSL



M110PM




Model	Style	Net Wt. Approx.
M140R	Modular	31 lbs.
MMRSL	Modular	72 lbs.
ML110RFZ	Modular	43 lbs.
M140RFZ	Modular	43 lbs.



MSSLPM



**M8CR**

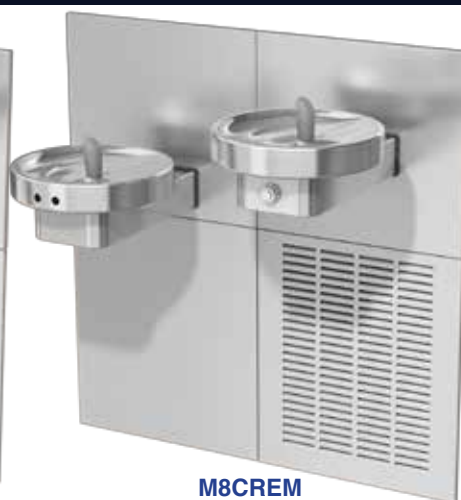

**M8CREM**



**M8WR**



**M8WRE**

## Standard Features

- Antimicrobial flex bubbler
- ADA Compliant when installed in an alcove or with right and left wing walls
- Built-in 100 micron strainer stops particles before they enter the waterway
- Lead-free waterways
- Brushed stainless steel finish
- Heavy duty galvanized steel mounting frame
- Electric eye models are sensor equipped for automatic operation
- Water flow stops after 30 seconds if user does not move away
- Bi-level models are field reversible

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Auto-Off Water Flow	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
M8CR	8.0	8.0	No	No	1/4	4.8	490	No	No	161 lbs.
M8CREM	8.0	8.0	No	No	1/4	4.8	550	No	No	161 lbs.
M8WR	8.0	8.0	No	No	1/4	4.8	490	No	No	132 lbs.
M8WRE	8.0	8.0	No	No	1/4	4.8	550	No	No	132 lbs.

\*All performance data measured with 80° F inlet water temperature. Specifications subject to change without notice.

# MODULAR COOLERS



**M8SBPM**



**M8SCPM**

## Standard Features

- Flex bubbler
- Built-in 100 micron strainer stops particles before they enter the waterway
- Brushed stainless steel finish
- Lead-free waterways
- Heavy duty galvanized steel mounting frame
- Bi-level models are field reversible

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
M8SBE	8.0	8.0	No	No	1/4	4.8	490	No	No	114 lbs.
M8SBPM	8.0	8.0	No	No	1/4	4.8	490	No	No	114 lbs.
M8SCEM	8.0	8.0	No	No	1/4	4.8	490	No	No	154 lbs.
M8SCPM	8.0	8.0	No	No	1/4	4.8	490	No	No	154 lbs.

\*All performance data measured with 80° F inlet water temperature. Specifications subject to change without notice.

# FULLY RECESSED COOLERS



**P8FPMCD  
P12FPMCD**



**P8FPM  
P12FPM**

Wall installation is particularly appropriate for schools, hospitals, public lobbies, and office corridors. Available in 8 or 12 gallon capacity. The basin provides plenty of headroom.

## Standard Features

- Lead-free waterways
- Stainless steel basin and grille
- Heavy gauge galvanized steel wall mounting sleeve
- High efficiency cooling tank and coil

## Options

- Glass/Carafe fillers (030239-003)

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
P8FPM	8.0	8.0	No	No	1/4	4.8	490	Yes	No	108 lbs.
P12FPM	12.0	12.0	No	No	1/3	5.4	540	Yes	No	112 lbs.
P8FPMCD	8.0	8.0	No	No	1/4	4.8	490	Yes	No	133 lbs.
P12FPMCD	12.0	12.0	No	No	1/3	5.4	540	Yes	No	137 lbs.

\*All performance data measured with 80° F inlet water temperature. Specifications subject to change without notice.

# SEMI-RECESSED COOLERS



**PLF8S  
PLF14S**



**PLF8SM  
PLF14SM**

Attractive 19" high stainless steel backsplash keeps walls clean. Slim design extends only 9.5" from the wall. Available in 8 and 14 GPH. Includes wall mounting frame.

## Standard Features

- Lead-free waterways
- Dial-A-Drink® Bubbler
- Stainless steel top
- Welded, heavy gauge galvanized steel frame
- High efficiency cooling tank and coil

## Options

- Glass/Carafe fillers (030239-003)
- Stainless steel

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF8S	8.0	8.0	No	No	1/5	4.3	430	Yes	Yes	94 lbs.
PLF14S	14.0	14.0	Yes	No	1/5	4.3	430	Yes	Yes	99 lbs.
PLF8SM	8.0	8.0	No	No	1/5	4.3	430	Yes	Yes	70 lbs.
PLF14SM	14.0	14.0	Yes	No	1/5	4.3	430	Yes	Yes	75 lbs.



# FREE STANDING COOLERS



**P3CP  
P5CP  
P10CP**



**PLF7P  
PLF13P**



**P8FA  
PLF8FAH  
P14FA  
PLF14FAH**

## Standard Features

- Lead-free waterways
- Dial-A-Drink® Bubbler
- Stainless steel top
- Standard cabinet finish in sandstone
- Galvanized steel frame
- Heavy gauge steel cabinet (P models)
- High efficiency cooling tank and coil

## Options

- Push handle glass filler (029603-004)
- Glass/Carafe fillers (030239-003)
- Stainless steel finish
- Foot pedal operated

**PLF13PL**



Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
Free Standing Models										
P3CP	3.0	3.0	No	No	1/4	4.4	440	Yes	Yes	62 lbs.
P5CP	5.0	5.0	No	No	1/4	4.4	440	Yes	Yes	68 lbs.
P10CP	10.0	10.0	No	No	1/4	4.4	440	Yes	Yes	73 lbs.
Against - A - Wall or Free Standing Models										
P8FA	8.0	8.0	No	No	1/4	4.4	440	Yes	Yes	88 lbs.
PLF8FAH**	8.0	8.0	No	Yes	1/4	8.9	900	No	Yes	94 lbs.
P14FA	14.0	14.0	Yes	No	1/4	4.4	440	Yes	Yes	93 lbs.
PLF14FAH**	14.0	14.0	No	Yes	1/4	8.9	900	No	Yes	99 lbs.
Free Standing Heavy Duty Water Coolers										
PLF7P	7.0	3.5	Yes	No	1/4	4.4	440	Yes	Yes	80 lbs.
PLF13P	13.3	7.0	Yes	No	1/4	4.4	440	Yes	Yes	85 lbs.
PLF13PL	13.3	7.0	Yes	No	1/4	4.4	440	Yes	Yes	85 lbs.

\*All performance data measured with 80° F inlet water temperature. Specifications subject to change without notice.

\*\*Hot N' Cold model delivers 4 six-ounce cups of hot water per hour in addition to cold water

# HAZARDOUS DUTY COOLERS



## Special Application Water Cooler designed for hazardous locations

This model is designed for installations where water cooling efficiency must be maintained under extreme environmental conditions and for hazardous atmospheres.

Ideal for use at oil-refineries, natural gas factories and other hazardous applications.

All controls and wiring are sealed in Underwriters' Laboratories (UL) listed enclosure to prevent ignition in explosive atmospheres.

### Standard Features

- Lead-free waterways
- Dial-A-Drink® Bubbler
- Stainless steel cabinetry
- Heavy duty galvanized structural steel frame
- High efficiency cooling tank and coil
- Internal air-gap provided on water-cooled condenser water outlet
- Special protective coating applied to compressor, condenser, cooling tank, pre-cooler, water drain and interconnecting water and refrigeration lines

### Options

- Push handle glass filler (029603-004)
- Kit 029137-002 is required for field installation of the above glass fillers
- Foot pedal operated

**P16FAWHDCP**  
**PLF20FACP**

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
P16FAWHDCP	15.5	8.4	Yes	No	1/3	5.2	520	Yes	No	90 lbs.
PLF20FACP	15.5	8.4	Yes	No	1/3	5.2	520	Yes	No	94 lbs.

\*All performance data measured with 80° F inlet water temperature. Specifications subject to change without notice.

# WATER CHILLERS

## Delicious chilled water on demand

### Standard Features of all Water Chillers

- Lead-free waterways
- High efficiency stainless steel cooling tank
- Steel frame construction

### Additional Features of the R1P

- Delivers 1 gallon of chilled drinking water per hour
- Ideal for under-sink or remote installations
- Waterways are all stainless steel



### Additional Features of the R8 and R12

- Delivers 8 or 12 gallons of chilled water per hour
- Designed for remote or in-a-wall installation with included shelf support.



### Options

- Cradle and stainless steel grille

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
R1P	1.0	N/A	N/A	N/A	1/20	1.2	120	N/A	White/Gray	30 lbs.
R5	5.0	N/A	N/A	N/A	1/5	3.6	360	N/A	N/A	50 lbs.
R8	8.0	N/A	N/A	N/A	1/5	4.8	490	N/A	N/A	58 lbs.
R12	12.0	N/A	N/A	N/A	1/5	5.4	540	N/A	N/A	62 lbs.

# ON-A-WALL COOLERS



**P8M**



**PLF4CM**

## Standard Features

- Lead-free waterways
- Dial-A-Drink® Bubbler
- Stainless steel top
- Sandstone finish
- Welded, heavy-gauge steel frame
- High efficiency cooling tank and coil

## Options

- Push handle glass filler (029603-004)
- Kit 029137-002 is required for field installation of the above glass fillers
- Stainless steel finish

Durable, economical coolers supply 4, 8 or 14 gallon of chilled drinking water per hour. Attractively styled unit is ideal wherever space is a consideration.

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
P8M	8.0	8.0	No	No	1/4	4.4	440	Yes	Yes	72 lbs.
PLF8MH	8.0	8.0	No	No	1/5	8.9	900	No	Yes	75 lbs.
P14M	14.0	7.8	Yes	No	1/4	4.4	440	Yes	Yes	77 lbs.
PLF14MH	14.0	7.8	Yes	No	1/5	8.9	900	No	Yes	80 lbs.
PM	Non-Refrigerated							No	Yes	36 lbs.
PLF4CM	4.0	2.5	Yes	No	1/8	3.5	350	No	Yes	52 lbs.
PCM	Non-Refrigerated							Yes	Yes	24 lbs.

\*All performance data measured with 80° F inlet water temperature. Specifications subject to change without notice.

# BARRIER-FREE WALL MOUNTED



## Standard Features

- ADA compliant for both adult or child when properly installed
- Lead-free waterways
- Stainless steel top
- Flexible bubbler guard
- Heavy duty galvanized steel frame
- High efficiency cooling tank and coil
- External stream height adjustment
- Standard cabinet in sandstone



**PLF8SKTP**



**NEW DESIGN AVAILABLE  
4TH QUARTER, 2015**

**PLF8SKPM with  
Antimicrobial Flex Bubbler**

Model	50° F Drinking Water/90° F Ambient Air Temp			Hot N' Cold Model	115 Volts, 60HZ			Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF8SKPM	8.0	8.0	No	No	1/4	4.4	440	No	Yes	70 lbs.
PLF8SKTP	8.0	8.0	No	No	1/4	4.4	440	No	Yes	70 lbs.

\*All performance data measured with 80° F inlet water temperature. Specifications subject to change without notice.



# DRINKING FOUNTAINS



**F110PM**



**F100**



**F140PM**



**F140R**



**F300R**



**F130PM**



**FLF202PM**



**F200PM**



**FLF201PM**



**F211PM**



**FLF231PM**



**F240PM**



**FLF221PM**



**F120**

Model	Style	Height	Width	Depth	Extended from Wall	Recessed into Wall
F100	Standard On-A-Wall	8 7/8"	17"	13 1/32"	13 1/32"	N/A
F110PM	Deluxe On-A-Wall	10 7/8"	13"	13 11/32"	13 11/32"	N/A
F120	Bracket Mounted On-A-Wall	9 3/16"	12 15/16"	13 3/32"	13 3/32"	N/A
F130PM	Simulated Semi Recessed	27 3/4"	17 15/16"	9 1/2"	9 1/2"	N/A
F140R	Radii Fountain	9 5/8"	14 1/2"	18 1/2"	18 1/2"	N/A
F140PM	On-A-Wall Fountain	10 7/8"	13"	19"	19"	N/A
F200PM	Semi Recessed Fountain	27 3/4"	17 5/16"	13"	9 1/2"	3 1/2"
F211PM	Fully Recessed Fountain	35"	18"	11"	1/2"	10 1/2"
F240PM	Fully Recessed Fountain	32 5/8"	18"	11"	1/2"	10 1/2"
F300R	Counter Top Fountain	3 1/2"	14"	14"	N/A	N/A
FLF201PM	Semi Recessed Cuspidor	27 3/4"	17 5/16"	13"	9 1/2"	3 1/2"
FLF202PM	Semi Recessed Fountain and Cuspidor	27 3/4"	17 5/16"	13"	9 1/2"	3 1/2"
FLF221PM	Fully Recessed Cuspidor	35"	18"	11"	1/2"	10 1/2"
FLF231PM	Fully Recessed Fountain and Cuspidor	35"	18"	11"	1/2"	10 1/2"

# ACCESSORIES

## Antimicrobial Water Saver Flex Bubbler



One Piece, Tamper-Proof, Non-Regulated Antimicrobial Bubbler for PG8AC and Radii  
Part 035607-111

## Antimicrobial Metal Bubbler



Tamper-Proof, Chrome Plated Brass, Non-Regulated Bubbler with antimicrobial insert for PG8AC and Radii  
Part 038305-001

## Adjustable Bubbler (Flexible Bubbler Guard)



Model 12000A  
Dial-A-Drink Adjustable Bubbler- With Flexible Bubbler Guard  
Part 030774-006  
Model 12000A  
Part 030774-015  
Model 12000AL

## Trim Bezel



Trim Bezel fits Oasis PG8AC Coolers. Available in sandstone powder coat and stainless steel.  
Part 035173-001 Sandstone  
Part 035173-003 Stainless Steel

## VersaFilter system



Oasis VersaFilter system can be factory-installed at additional cost.

## Cane Apron



Accessory apron is designed to allow compliance with the Americans with Disabilities Act (A.D.A.) and will provide the 27" max clearance mandate when properly installed

Part 035174-001 in sandstone  
Part 035174-003 in stainless steel



Significantly more water and energy efficient



Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988



ADA Compliant when properly installed



Product Certified to NSF/ANSI Standard 61-G & 372 (weighted average lead content of  $\leq 0.25\%$ ) and in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953)

## Oasis Warranty Information (continental limits of the U.S. and Canada)

### Refrigerated Models

Limited 5-year warranty: 5-year on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each cooler; sample copy available upon request.

### Fountains and Cuspidors

Limited 1-year warranty: One year from date of installation on parts only.

### Accessory

The manufacturer warrants the accessory to be free from defects in material and workmanship under normal use and service for a period of one year from date of original installation. The manufacturer's obligation shall be limited to repairing or replacing any inoperative part, which upon manufacturer's examination discloses to be defective in material and workmanship. Labor charges to remove and reinstall any inoperative part in the field is the responsibility of the owner.

The official site to order Oasis and Sunroc water cooler replacement parts

**OEM Replacement Parts**  
[oasiscoolers.com/parts](http://oasiscoolers.com/parts)

The convenient way to locate, identify and purchase OEM replacement parts

